


CWA Cable Fairings have been designed to reduce drag and strum. They are easily fitted to standing cables without access to a cable end. They are flexible enough to be stored on a winch drum or quickly removed for use on other cables.

Fitting is achieved by wrapping around a cable and securing by means of a continuous Velcro strip.

An additional safeguard against accidental detachment are the use of High Security Ties passed through the fairing and around the cable.

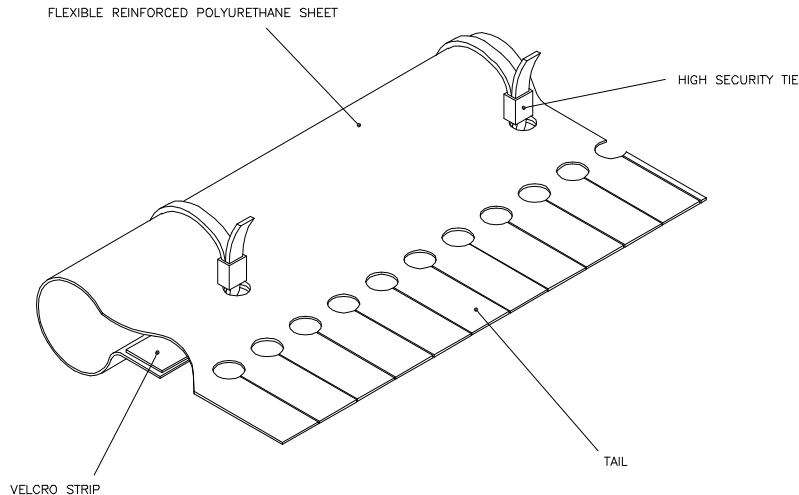

DATE	15Jan'97		
DRAWN	fjj		
SCALE	NTS		1
CHECKED		DATE	C.NOTE
		ISS	

CWA DESIGN COPYRIGHT  
NOT TO BE USED OR RE-  
PRODUCED WITHOUT EXPRESS  
PERMISSION FROM CWA

TOLERANCES :- UNLESS OTHERWISE STATED  
NO DEC PLACE  $\pm 0.5$  ANGULAR  $\pm 1/4^\circ$   
1 DEC PLACE  $\pm 0.3$  2 DEC PLACE  $\pm 0.15$   
HOLES UP TO 12.7mm  $+0.10\text{mm} -0$   
ALL COAXIAL DIAS CONCENTRIC WITHIN 0.05mm  
ALL HOLES ON PITCH CIRCLES WITHIN 0.10mm OF TRUE POS.

REMOVE ALL SHARP  
EDGES WITH 0.40 RAD  
OR CHAMFER UNLESS  
OTHERWISE STATED

MATERIAL

REINFORCED FABRIC  
AND VELCRO

FINISH

NATURAL

DRWG No.

10-2703

SURFACE  
FINISH

D.B.  
V

UNLESS  
OTHERWISE  
STATED

**CWA PRODUCTS LIMITED HOOK BASINGSTOKE HANTS**

TITLE

WRAP ROUND CABLE FAIRING