
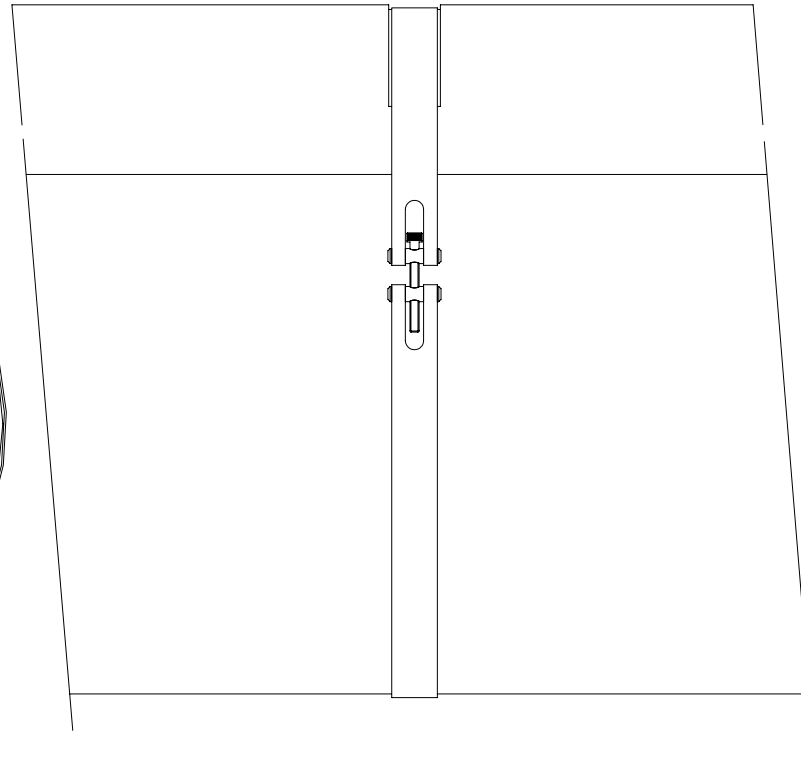


DRWG No

10-3168

THIRD ANGLE PROJECTION. DIMNS. IN MM

ARAMID STRAP CLAMP

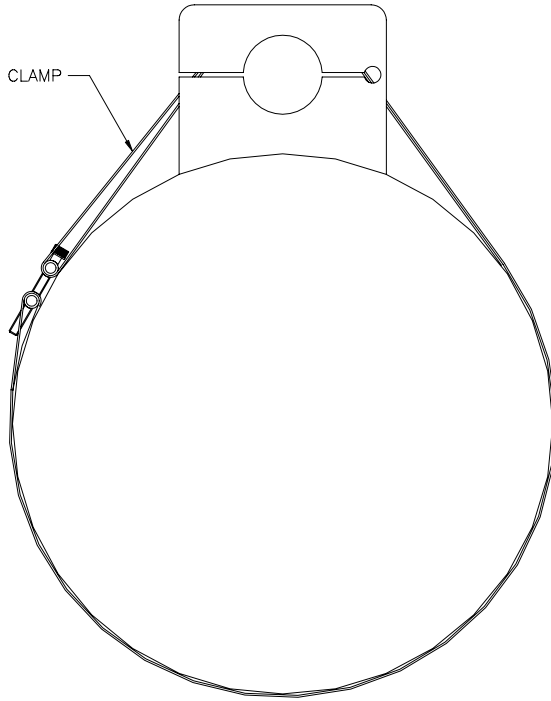


STRAP SPECIFICATION

LOAD BEARING MATERIAL KEVLAR 29
 CENTRE MATERIAL POLYESTER
 COATING EAA
 TAPE WEIGHT 151g.m
 BREAKING STRENGTH 30kN
 ELONGATION AT BREAK 3%
 SAFE WORKING LOAD 7.5kN
 ELONGATION AT SWL 0.6%
 LOAD DROP 20% AFTER 72 HOURS
 INSTALLATION LOAD 10kN
 HEAT RESISTANCE UP TO 75°C

KEVLAR AND THE EAA COATING ARE UNAFFECTED BY SEAWATER

DATE 4Nov'02				CWA DESIGN COPYRIGHT NOT TO BE USED OR RE- PRODUCED WITHOUT EXPRESS PERMISSION FROM CWA	TOLERANCES :- UNLESS OTHERWISE STATED NO DEC PLACE ±0.5 ANGULAR ±1/4° 1 DEC PLACE ±0.3 2 DEC PLACE ±0.15 HOLES UP TO 12.7mm +0.10mm -0 ALL COAXIAL DIAS CONCENTRIC WITHIN 0.05mm ALL HOLES ON PITCH CIRCLES WITHIN 0.10mm OF TRUE POS.	REMOVE ALL SHARP EDGES WITH 0.40 RAD OR CHAMFER UNLESS OTHERWISE STATED	MATERIAL	FINISH	SURFACE FINISH 0.8 UNLESS OTHERWISE STATED
DRAWN fjj							DRWG No. 10-3168		
SCALE NTS	4Nov'02		1	CWA PRODUCTS LIMITED HOOK BASINGSTOKE HANTS				TITLE	CLAM STRAPPING SYSTEM
CHECKED	DATE	C.NOTE	ISS						

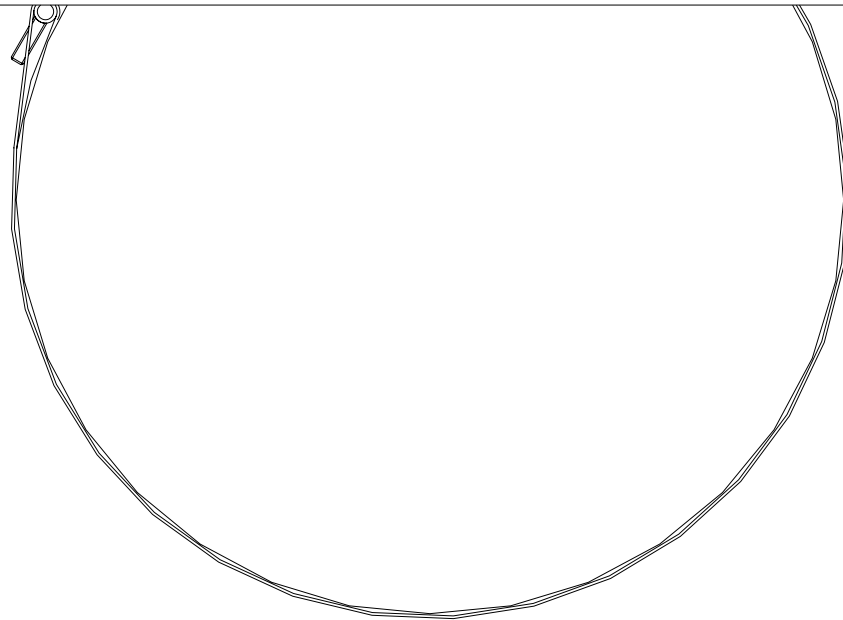

STRAP SPECIFICATION

LOAD BEARING MATERIAL	KEVLAR 29
CENTRE MATERIAL	POLYESTER
COATING	EAA
TAPE WEIGHT	151g.m
BREAKING STRENGTH	30kN
ELONGATION AT BREAK	3%
SAFE WORKING LOAD	7.5kN
ELONGATION AT SWL	0.6%
LOAD DROP	20% AFTER 72 HOURS
INSTALLATION LOAD	10kN
HEAT RESISTANCE	UP TO 75°C

KEVLAR AND THE EAA COATING ARE UNAFFECTED BY SEAWATER

DATE 4Nov'02				CWA DESIGN COPYRIGHT NOT TO BE USED OR RE- PRODUCED WITHOUT EXPRESS PERMISSION FROM CWA	TOLERANCES :- UNLESS OTHERWISE STATED NO DEC PLACE ±0.5 ANGULAR ±1/4° 1 DEC PLACE ± 0.3 2 DEC PLACE ±0.15 HOLES UP TO 12.7mm +0.10mm -0 ALL COAXIAL DIAS CONCENTRIC WITHIN 0.05mm ALL HOLES ON PITCH CIRCLES WITHIN 0.10mm OF TRUE POS.	RE EDG OR O
DRAWN fjj						
SCALE NTS	4Nov'02		1			
CHECKED	DATE	C.NOTE	ISS			
<i>CWA PRODUCTS LIMITED HOOK BASINGSTOKE</i>						